

Date of Deposit: November 17, 1999

A

MDJ:rfb 11/17/99

PATENT

Attorney's Ref. No. 5922-53642

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box PATENT APPLICATION
 ASSISTANT COMMISSIONER FOR PATENTS
 Washington, D.C. 20231

Transmitted herewith for filing is the patent application of:

Inventor(s): Anders Grunnet-Jepsen, Alan E. Johnson, Eric S. Maniloff, Thomas W.

Mossberg, Michael J. Munroe, John N. Sweetser

For: CODE-BASED OPTICAL NETWORKS, METHODS, AND APPARATUS

Enclosed are:

- ☒ 13 pages of specification, 4 pages of claims, an abstract and a Combined Declaration and Power of Attorney (unsigned).
☒ 5 sheet(s) of informal drawings.

CLAIMS AS FILED


For	Claims Filed	Number Free	Number Extra	Rate	Basic Fee
Total Claims	21	20	= 1	\$9.00	\$ 9.00
Independent Claims	6	3	= 3	\$39.00	\$ 117.00
Multiple Dependent Claim Fee				\$130.00	\$0.00
TOTAL FILING FEE					\$506.00

- ☒ Please return the enclosed postcard to confirm that the items listed above have been received.

Respectfully submitted,

KLARQUIST SPARKMAN CAMPBELL
 LEIGH & WHINSTON, LLP

By



Michael D. Jones

Registration No. 41,879

One World Trade Center, Suite 1600
 121 S.W. Salmon Street
 Portland, Oregon 97204
 Telephone: (503) 226-7391
 Facsimile: (503) 228-9446
 cc: Client
 Donald L. Stephens Jr., Esq.
 Docketing Secretary

RECEIVED
 DEC - 7 1999
 OIPE/JCWS

CODE-BASED OPTICAL NETWORKS, METHODS, AND APPARATUS

Field of the Invention

5 The invention pertains to optical communication systems.

Background of the Invention

Optical fibers provide communication bandwidths as large as tens of Terahertz (THz). Such large bandwidths are too large to be fully used
10 by single-channel communication systems that transmit data by amplitude modulation of a narrow-bandwidth optical carrier such as by directly modulating a distributed feedback laser. Factors limiting the bandwidth occupied by simple amplitude-modulated systems include bandwidth limits on available electronic and optical components such as
15 optical modulators and detectors, as well as fiber dispersion.

In order to more fully use the available bandwidth of an optical fiber, multiplexing techniques have been developed that permit several communication channels to use the same optical fiber. The total fiber bandwidth used by these channels can be as large as the sum of the
20 individual channel bandwidths. Conventional methods for multiplexing in optical communication systems include time-division multiplexing (TDM), wavelength-division multiplexing (WDM), and optical-code-division multiple access (OCDMA). These optical multiplexing methods are typically used in long haul, point-to-point communication and in
25 short haul, ring-topology communication systems. Each of these methods has benefits as well as drawbacks associated with it.

A passive optical network (PON) capable of transmitting and receiving data from a large number of users simultaneously reduces cost and increases system reliability. A PON includes passive optical

components that route optically encoded data streams to and from designated users or network nodes. Communication systems based on the Synchronous Optical Network ("SONET") are not PONs since each user or node in a SONET system must have active equipment to detect and demultiplex the data stream to recover data, and then retransmit data to the next user or node.

WDM systems are PONs, but each user of a WDM system is assigned a specific wavelength, so that WDM-based PONs are expensive and are not readily reconfigurable.

The use of OCDMA in a PON is advantageous in that data encoded onto a single transmitter can be distributed among many users because data is distinguished by a complex temporal code, and not wavelength as in WDM systems. Furthermore, CDMA coding has the advantage that the number of users is flexible, dependent on system usage. Also, most OCDMA implementations inherently offer hardware encryption by making channel decoding difficult without knowledge of the OCDMA encoding scheme. However, flexible tree-architecture PONs based on OCDMA typically require expensive equipment that must be located at each network node or an end-user location. Therefore, improved systems, methods, and architectures are needed for practical PON OCDMA systems.

Brief Description of the Drawings

FIG. 1 is a schematic block diagram of a communication system that includes a passive optical network (PON).

FIG. 2 is a schematic block diagram of the central station of FIG. 1.

FIG. 3 is a schematic block diagram of a representative level-A multiplexing (mux) station.

FIG. 4 is a schematic diagram of a level-A address encoder.

FIG. 5 is a schematic diagram of a level-A address decoder.

FIG. 6 is a schematic diagram of a representative level-B mux station.

5 FIG. 7 is a schematic diagram of a level-B address decoder.

FIG. 8 is a schematic diagram of a level-B address encoder.

FIG. 9 is a schematic diagram of a representative user station of the communication system of FIG. 1.

10 FIG. 10 is a schematic diagram of a data-transmission system using 3-chip supercodes and 3-chip subcodes.

Detailed Description

FIG. 1 illustrates an optical communication system 100 comprising a central station 103 that distributes optically transmitted data (telephony, internet, video, etc.) to a number of geographically separated users $117_{11}, \dots, 117_{nm}$ that communicate with the central station 103 via a passive optical network 151. In addition, the central station 103 collects data from the user stations $117_{11}, \dots, 117_{nm}$ for remote transmission via an optical communication link 121. For convenience in describing the communication system 100 and other communication systems and apparatus, a "downstream direction" is defined as a data-propagation direction from a central station to a user. An "upstream direction" is a data-propagation direction from a user to a central station.

25 In the communication system 100, multiple data streams are multiplexed and demultiplexed by using optical-code-division multiple access (OCDMA). As shown in FIG. 1, the communication system 100 has a tree architecture with a level-A mux station 111 and level-B mux stations $113_1, \dots, 113_n$. While FIG. 1 shows the level-A mux station

111 as a single branch from the central station 103, the central station 103 can communicate with multiple level-A mux stations.

FIG. 2 is a schematic diagram of the central station 103. The central station 103 comprises an input data module 201 that receives data transmitted to or produced at the central station 103. As shown in FIG. 1, the central station 103 receives data from an external data link 121 or from the level-A mux station 111. Returning to FIG. 2, the input-data module 201 delivers an electrical data signal to an optical transmitter 203 that includes an optical emitter such as a distributed feedback laser. The laser is modulated in response to the electrical data signal so as to produce an optical data signal. Alternatively, an emitter can be provided that emits a continuous optical signal or a periodic series of optical pulses that are modulated with an electro-optic, acousto-optic, electro-absorptive, or other modulator. The modulation can be amplitude-modulation or phase-modulation or a combination thereof.

A central station address encoder 205 receives the optical data signal from the optical transmitter 203 and encodes the modulated optical signal with an optical code such as a composite code serving as an address for a selected user. In an alternative embodiment, the central station address encoder 205 can include encoders for every user (a total of $n \times m$ encoders), or a smaller number of programmable encoders depending on system requirements, e.g., the aggregate downstream bandwidth and the number of users to be simultaneously addressed.

Composite codes are described in a U.S. Patent Application entitled CODES, METHODS, AND APPARATUS FOR OPTICAL ENCODING AND DECODING, co-filed with the present application and incorporated herein by reference. Representative encoders and decoders

using fiber Bragg gratings are described in U.S. Patent App. No. 09/354,851, TIME-WAVELENGTH MULTIPLE ACCESS COMMUNICATION SYSTEM that is incorporated herein by reference.

The composite codes are made of one or more code sets, each
5 code set corresponding to the number of mux levels. In the two-node (two mux levels) network of FIG. 1, the central station address encoder 205 applies composite codes having two levels A, B corresponding to level-A codes and level-B codes. If a third group of nodes were provided (i.e., if a level-C mux station were placed between the level-B mux
10 stations $113_1, \dots, 113_n$ and user stations $117_{11}, \dots, 117_{nm}$ to provide a third level of coding), then the central station address encoder 205 could apply the level-C codes. In such a case, the composite codes would include A-level, B-level, and C-level codes. Composite-code encoders can be configured in a variety of ways as described in the
15 references cited above.

Returning further to FIG. 2, an output module 207 of the central station 103 delivers combined optically coded (composite-coded) data signals from the encoders of the central station address encoder 205, and delivers a coded optical signal to the level-A mux station 111. The
20 coded signal delivered to the level-A mux station 111 is encoded with level-A and level-B codes that designate a user station to which data is to be delivered.

The central station 103 further comprises an input module 209 that receives optical signals from the level-A mux station 111 and
25 delivers optical signals to a central station address decoder 211 that decodes the level A and level B codes with which the optical signals are encoded. After the optical signals are thus decoded, an optical receiver 213 produces an uncoded electrical signal corresponding to the decoded

optical signal, and an optical transmitter ("output data module") 215 transmits a corresponding optical signal on the communication link 121.

FIG. 3 is a schematic diagram of the level-A mux station 111. An input module ("input means") 301 of the level-A mux station 111
5 accepts optical, composite-coded data signals from the central station 103. The input module 301 directs the optical data signals to a level-A address decoder/router 303. Output modules ("output means") 305₁, . . . , 305_n receive optical data signals from the level-A address
10 decoder/router 303, split the received optical data signal into n optical data signals, and transmit these signals to respective level-B mux stations 113₁, . . . , 113_n.

The level-A mux station 111 also includes input modules ("input means") 307₁, . . . , 307_n that receive optical data signals from
15 respective level-B mux stations 113₁, . . . , 113_n. A level-A address encoder 309 applies a level-A code to the received optical signals and directs the encoded optical signals to an output module ("output means") 311 for delivery to the central station 103.

FIG. 4 is a schematic diagram of the level-A address
20 decoder/router 303. A beam splitter ("beam splitting means") 403 or a fiber directional coupler receives optical signals from the input module 303 and directs portions of the optical signals to optical circulators 405₁, . . . , 405_n that, in turn, direct respective portions of the optical signals to corresponding complex fiber Bragg gratings 401₁, . . . , 401_n that decode level-B codes. Decoded optical signals are delivered to
25 corresponding outputs 409₁, . . . , 409_n that deliver a respective decoded optical signal to a corresponding level-B mux station. The optical signals for the respective level-B mux stations 113₁, . . . , 113_n can be broadcast, and data not intended for delivery to a particular level-B mux station (and ultimately to a selected user station) is not properly

decoded at the decoder/router 303. For data decoded with an unmatched decoder, the optical signal is typically a noise-like, low-power signal.

FIG. 5 is a schematic diagram of the level-A address encoder 309.

- 5 Level-B coded optical signals are received at corresponding inputs $509_1, \dots, 509_n$ and delivered to respective optical circulators $511_1, \dots, 511_n$ and respective fiber Bragg gratings $513_1, \dots, 513_n$. After encoding with level-A codes by the fiber Bragg gratings $513_1, \dots, 513_n$, encoded optical signals are combined by a beam combiner ("beam combining means") 515 for delivery to the output module 311 and the
- 10 central station 103.

- FIG. 6 is a schematic diagram of a representative level-B mux station 113_i . The level-B mux station 113_i includes an input module ("input means") 601_i that accepts an optically coded data signal from
- 15 the level-A mux station 111. A level-B address decoder/router 603_i receives the optical data signal and splits the optical data signal into m corresponding optical data signals $604_{i1}, \dots, 604_{im}$, corresponding to the m user stations $117_{i1}, \dots, 117_{im}$. Output modules $607_{i1}, \dots, 607_{im}$ transmit the split optical data signals $604_{i1}, \dots, 604_{im}$.

- 20 FIG. 7 is a schematic diagram of the representative level-B address decoder/router 603_i. A beam splitter ("beam splitting means") 703_i or a fiber directional coupler receives an optical signal from the level-A mux station 111 and directs respective portions of the optical signal to optical circulators $705_{i1}, \dots, 705_{im}$ that, in turn, direct the
- 25 respective portions to corresponding fiber Bragg gratings $701_{i1}, \dots, 701_{im}$ that decode level-B codes. The optical signal from the level-A mux station 111 can be broadcast to the respective level-B mux station because data not intended for delivery to a particular level-B mux station (and ultimately to a selected user station) is not properly

decoded in the decoder/router 603_i. For data decoded with an unmatched decoder, the optical signal is typically a noise-like, low-power signal and data is not readily recovered from such signals.

FIG. 8 is a schematic diagram of the level-B encoder 611_i. Optical signals are received from user stations 117_{i1}, . . . , 117_{im} at respective inputs 801_{i1}, . . . , 801_{im} and delivered to respective optical circulators 803_{i1}, . . . , 803_{im} and fiber Bragg gratings 805_{i1}, . . . , 805_{im} that encode level-B codes. Encoded optical signals propagate along fiber lengths 807_{i1}, . . . , 807_{im} to a beam combiner ("beam combining means") 811_i, and the combined optical signal is delivered to the level-A mux station 111.

The user stations 117_{il}, . . . , 117_{nm} include respective interface modules, such as a representative interface module 901_{ij} shown in FIG. 9. The interface module 901_{ij} comprises an output module ("output means") 903_{ij} and an input module ("input means") 905_{ij} that send data to and receive data from a corresponding level-B mux station 113_i. The input module 905_{ij} receives a decoded optical signal from the corresponding decoder of the level-B mux station 113_i. An optical receiver 907_{ij} converts the decoded optical signal into a corresponding electrical signal. If the decoded optical signal originated at the central station 103 and was encoded with the level-A and level-B codes associated with the selected user station 117_{ij}, then the electrical signal includes a series of data pulses. If the level-A and level-B codes applied at the central station 103 have not been properly decoded, then the electrical signal is a noise-like signal that can include some electrical pulses similar to data pulses but having smaller magnitudes. The optical receiver 907_{ij} can include circuitry for removing or attenuating these smaller pulses and the noise-like background by thresholding and/or digitization, producing an enhanced electrical data output signal. The

data output module delivers the electrical data output signal to a module output 911_{ij}.

For communication in an upstream direction, i.e., from a user station 117_{ij} towards the central station 103, an input module 913_{ij} receives data from a user input 915_{ij}. The received data modulates an optical transmitter ("modulated optical source") 917_{ij} and the output module 903_{ij} transmits an uncoded optical signal to a level-B mux. The optical transmitter 917_{ij} can include a laser diode that is directly modulated by the received data, or that is modulated by an electro-optic, acousto-optic, electro-absorptive, or other modulator. Corresponding level-A and level-B mux stations apply level-A and level-B codes to the uncoded optical signal, and the coded signal arrives at the central station 103 where it can be decoded for transmission by stripping the level-A and level-B codes that indicate the data source.

Returning to FIG. 1, the PON 151 includes coders (encoders and decoders, not shown) that apply and strip codes from optical data signals. These coders require no power, nor is an optical-to-electrical conversion needed in the PON 151. In some cases, partially encoded and decoded optical signals are broadcast, but data generally cannot be recovered from these broadcast optical signals unless decoded and encoded with matching codes. Hence, the PON 151 is "secure."

The embodiments described herein comprise encoders and decoders that include optical circulators and reflective complex fiber Bragg gratings. Other coding methods and apparatus can be used. Such methods and apparatus also apply selected linear spectral transforms to optical signals. Furthermore, other methods and apparatus, such as beam splitters or fiber couplers, can be used to separate counterpropagating optical data signals instead of optical circulators. Representative optical encoders and decoders include

passive diffractive devices such as Bragg gratings and fiber Bragg gratings as described in, for example, U.S. Patent No. 5,812,318; U.S. Patent Application Nos. 09/115,331, SEGMENTED TASM GRATINGS, 09/120,959, SEGMENTED COMPLEX FIBER GRATING, and
5 09/354,851, TIME WAVELENGTH MULTIPLE ACCESS COMMUNICATION SYSTEM. These documents are incorporated herein by reference.

The communication system 100 of FIG. 1 can include optical amplifiers if necessary, based on system-design parameters such as
10 fiber loss, desired signal-to-noise level, intended number of users, acceptable bit-error rate, and others. Dispersion compensation can be provided in the PON 151 and a wavelength-division-multiplexed (WDM) layer can be provided in addition to the code layer. In addition, embodiments are discussed with reference to optical signals that are
15 electromagnetic fields of wavelength from about 300 nm to 0.1 mm. However, embodiments using longer or shorter wavelength electromagnetic fields are possible and electrical voltages carried by conductors such as wires can be used as well.

For convenience in describing embodiments, decoders were
20 referred to as "stripping" a code from a signal. Decoding generally permits data recovery by a detector, and decoding need not restore a signal exactly to its pre-encoded form. In addition, a signal from which a code has been stripped can be referred to as a "decoded" signal. Finally, for clarity, encoders and decoders are referred to in the above
25 description, but can be more generally referred to as "coders."

For convenience, composite codes that include two code levels and suitable for use in a passive optical network and in address encoders/decoders are described with reference to FIG. 10. FIG. 10 is a schematic of a data transmission system 1001 that produces a data

signal 1003 from a data source 1005. As shown in FIG. 10, the data signal 1003 is represented as a binary, on-off modulation of an electromagnetic carrier such as an optical carrier. The on-off modulation is selected for convenience only, and other modulations can include
5 phase, amplitude, intensity, and frequency modulation. In addition, non-binary modulation having more than two modulation levels can be used.

A supercode encoder 1007 receives the data signal 1003 and applies a predetermined code R_i selected from a code set R to the data signal 1003. For purposes of illustration, a code $R_i = \{1, -1, 1\}$ is
10 selected and applied to a representative bit 1009 of the data signal 1003. As specified by the code R , the encoder 1007 receives the bit 1009 and transforms the bit into a "super-coded" bit packet 1011. The super-coded bit packet 1011 includes super-coded bits ("superbits") 1013-1015 that are relatively delayed by a delay time T_{RC} , wherein T_{RC}
15 is a supercode chip duration. In addition, the phase of the superbit 1014 is inverted, while the phases of the superbits 1013, 1015 are unchanged. The encoder 1007 applies the code R_i to the entire data signal 1003 to produce a supercoded data signal that is a sum of superbits corresponding to all respective bits of the data signal 1003.

20 A subcode encoder 1017 receives the supercoded data signal and applies a code S_i selected from a code set S . For purposes of illustration, a code $S_i = \{-1, 1, -1\}$ is selected. The code S_i is applied to the supercoded bit packet 1011 to produce a combined subcoded and supercoded ("composite-coded") bit packet 1021 that includes
25 subcoded bits 1023, 1025, 1027, corresponding to respective superbits 1013, 1014, 1015. The encoder 1017 encodes each of the supercoded bits 1013-1015 by relatively delaying portions by a delay time T_{sc} wherein T_{sc} is a subcode chip duration, and changing the phase of the supercoded bits 1013, 1015, to produce the corresponding subcoded

bits 1023, 1025, 1027. The encoder 1017 applies the code S_i to the supercoded data signal, producing a composite-coded data signal.

The encoders 1007, 1017 apply codes from respective sets R, S to the data signal 1003. If the sets R, S contain N_R and N_S codes, respectively, then $N_R \times N_S$ different encodings are available. For example, if sets R, S each include 5 codes, then 25 encodings are possible. Thus, the number of available encodings increases as the product of N_R and N_S increases so that large numbers of encodings are possible even with small code sets. In addition, the sets R, S can be subsets of a large code set and can include different or identical codes. In this way, a set of N codes can be used to produce N^2 different encodings.

FIG. 10 illustrates encoding, with two sets of codes (sets R, S), but additional code sets can be used to further increase the number of available encodings. Subcode bits 1013-1015 can be further encoded with a code set Q having N_Q codes, so that the number of available encodings is $N_R \times N_S \times N_Q$. Codes obtained by combining two or more code sets such as the code sets R, S are referred to herein as "composite codes." Composite codes using code sets R, S and code sets R, S, Q are suitable for networks having two and three levels of address encoding/decoding, respectively.

The codes R_i , S_i used above are selected as representative examples. More generally, codes include two or more "chips" that specify modulations to be applied to a signal. The chip modulations are applied to a signal at relative times differing by a chip duration T_C . Thus, a code and a chip duration specify an encoding of a data signal. A supercode is further specified by an interchip duration. A code R, having a total duration T_R , a number of chips N_R , and a chip duration T_{RC} , and a code S, having a total duration T_S , a number of chips N_S , and chip

duration or interchip delay T_{sc} , are effectively orthogonal as decoded if $T_R \leq T_{sc}$. A composite code can be produced from the code R (a subcode), and from the code S (a supercode). The composite code has a given duration equal to the duration of the supercode and has a number of chips equal to the product of the number of chips of the subcode and the supercode. The chip duration is equal to the subcode chip duration. In the composite code, the subcode is repeated a number of times equal to the number of chips in the supercode.

Code sets and chip durations of supercodes and subcodes (and sub-subcodes) are preferably selected so that a data signal encoded with a particular composite code is decoded only with a matching decoding composite code. Decoding with an unmatched composite code produces only a noise-like background or low amplitude "sidelobes" or "crosstalk."

Given temporal orthogonality between a supercode and the subcode (i.e., low-amplitude cross-correlation and noise-like background), composite code sets of sufficient orthogonality can be generated from a code set with a small number of chips if the codes of the code set are sufficiently orthogonal. A code in a composite code set is generated by using a selected code of the code set as a supercode and another selected code of the code set as a subcode. A composite code set comprises all combinations of supercodes and subcodes. For example, if a code set has M codes each containing N_m chips, then the composite code set contains $M \times M$ codes each having $N_m \times N_m$ chips.

Having illustrated and demonstrated the principles of the invention, it should be apparent to those skilled in the art that the embodiments described can be modified in arrangement and detail without departing from such principles. We claim as the invention all that comes within the scope of these claims.

What is claimed is:

1. A communication system, comprising:
 - a central station that receives an optical data signal and applies a
5 composite code to the optical signal, the composite code including a
first code and a second code, so as to produce a composite-coded
optical signal;
a first-level mux station that receives the composite-coded optical
10 signal and decodes the first code from at least a portion of the optical
signal, producing a first-level decoded optical signal;
a second-level mux station that receives the first-level decoded
optical signal and decodes the second code from at least a portion of
the optical signal, thereby producing a fully decoded optical signal; and
a user station that receives the fully decoded optical signal.
15
2. The communication system of claim 1, wherein the first-level
mux station includes a reconfigurable encoder for applying a selected
composite code.
- 20 3. The communication system of claim 1, wherein the central
station applies a composite code selected from a set of composite
codes.
4. The communication system of claim 3, wherein composite
25 codes are generated from a set of first-level codes and a set of second-
level codes.
5. A central station for an optical network, comprising:

a receiver that receives a first optical data signal and produces a corresponding electrical data signal;

a transmitter that produces a second optical data signal based on data defined by the electrical data signal; and

5 an encoder that applies a code to the second optical data signal.

6. The central station of claim 5, wherein the code applied by the encoder is a composite code.

10 7. The central station of claim 5, wherein the code is an address code that designates an intended destination for at least some of the data defined by the electrical data signal.

8. A multiplexing station for an optical network, comprising:
15 an address decoder that receives a signal containing data and coded according to an address code and strips the code from the signal, wherein the address code designates a destination for at least a portion of the data; and

an address encoder that receives a signal containing data and
20 encodes the signal to identify a destination of at least some of the data.

9. The multiplexing station of claim 8, wherein the address decoder strips an optical code from the signal.

25 10. The multiplexing station of claim 9, wherein the code is a composite code.

11. The multiplexing station of claim 8, wherein the address encoder applies an optical code.

12. The multiplexing station of claim 11, wherein the code is a composite code.

5 13. The multiplexing apparatus of claim 8, wherein the address encoder includes at least one fiber Bragg grating that applies the code.

10 14. The multiplexing apparatus of claim 8, wherein the address decoder comprises at least one fiber Bragg grating that strips the code.

 15. The multiplexing apparatus of claim 14, further comprising an optical circulator that directs the signal to at least one fiber Bragg grating.

15 16. A method of broadcasting an optical signal to a plurality of user stations for data recovery only by a selected user, comprising:
 selecting a code for the optical signal;
 applying the code to the optical signal with at least one fiber Bragg grating.

20 17. The method of claim 16, wherein the code is a composite code.

25 18. A passive optical network, comprising at least one multiplexing station that receives a first optical signal, applies a first-level code to the first optical signal, and transmits a coded first optical signal; and that receives a second optical signal, decodes a first-level code from the second optical signal, and transmits a resulting decoded optical signal.

19. The passive optical network of claim 18, further comprising a second-level multiplexing station that receives an optical signal from the first-level multiplexing station and decodes the optical signal to decode a second-level code.

5

20. The passive optical network of claim 19, wherein the second-level multiplexing station applies a second-level code to an optical signal that is transmitted to the first-level multiplexing station.

10

21. A communication system, comprising:

a user station that transmits an optical signal.

a second-level mux station that receives the optical signal and applies a second-level code to the optical signal, thereby producing an encoded optical signal;

15

a first-level mux station that receives the encoded optical signal from the second-level mux station and applies a first-level code to the encoded optical signal producing a composite-coded optical signal; and

a central station that receives the composite-coded optical signal and decodes the first-level code and the second-level code to identify

20

the user station that transmitted the optical signal.

CODE-BASED OPTICAL NETWORKS, METHODS, AND APPARATUS**Abstract**

Optical communication systems include a central station that encodes data transmitted to multiplexing (mux) stations or user stations.

- 5 The central station also decodes data received from the mux stations or user stations. Encoding and decoding are performed using codes, such as composite codes, that designate sources and destinations for data. The mux stations, user stations, and the central station have address encoders and decoders that use, for example, fiber Bragg gratings to
- 10 encode or decode optical signals according to a code such as a composite code derived by combining codes from one or more sets of codes. A passive optical network comprises one or more levels of mux stations that use such address decoders and encoders to receive, decode, and encode data for transmission toward a central station or a
- 15 user station.

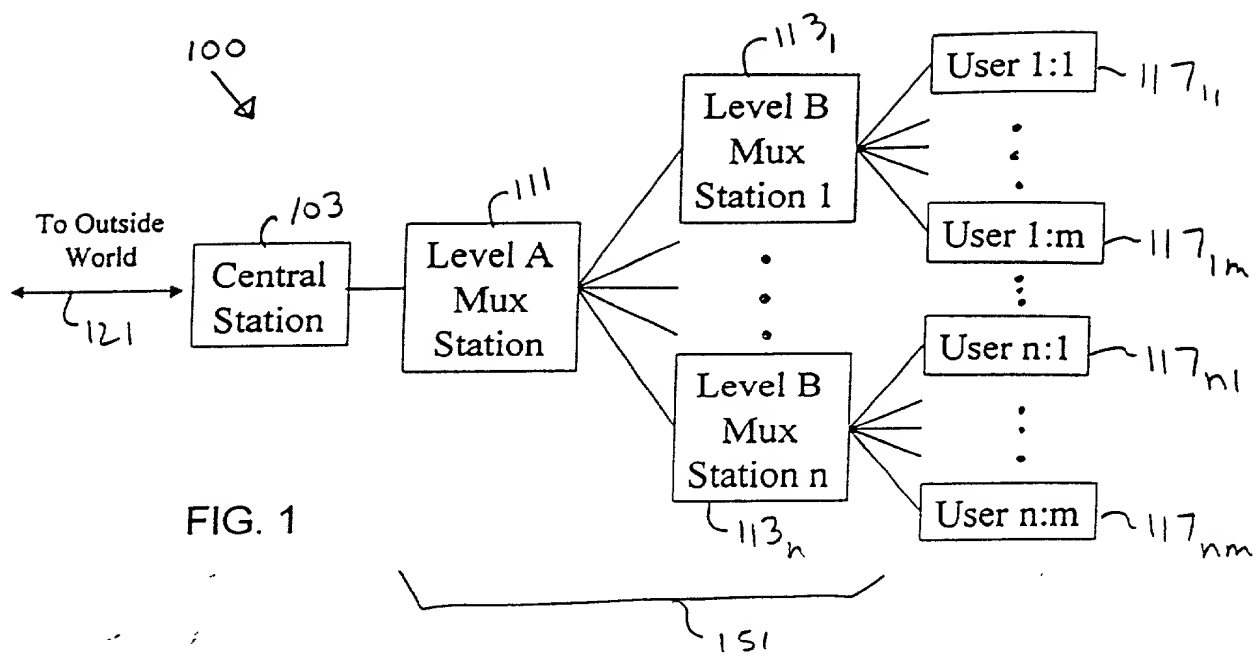
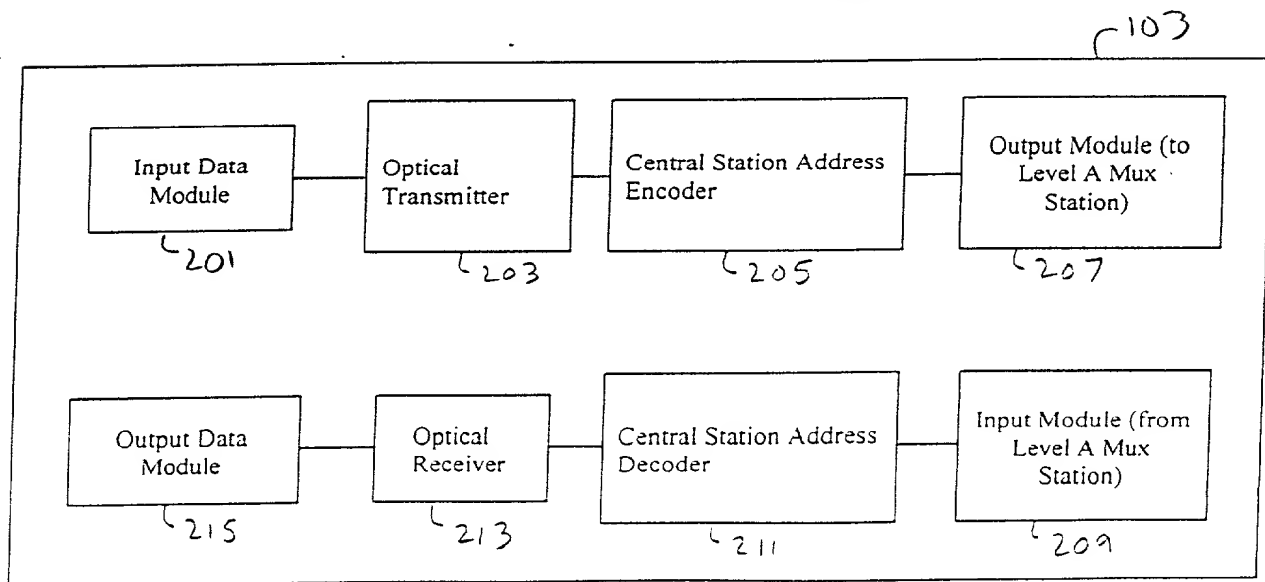


FIG. 1

FIG. 2



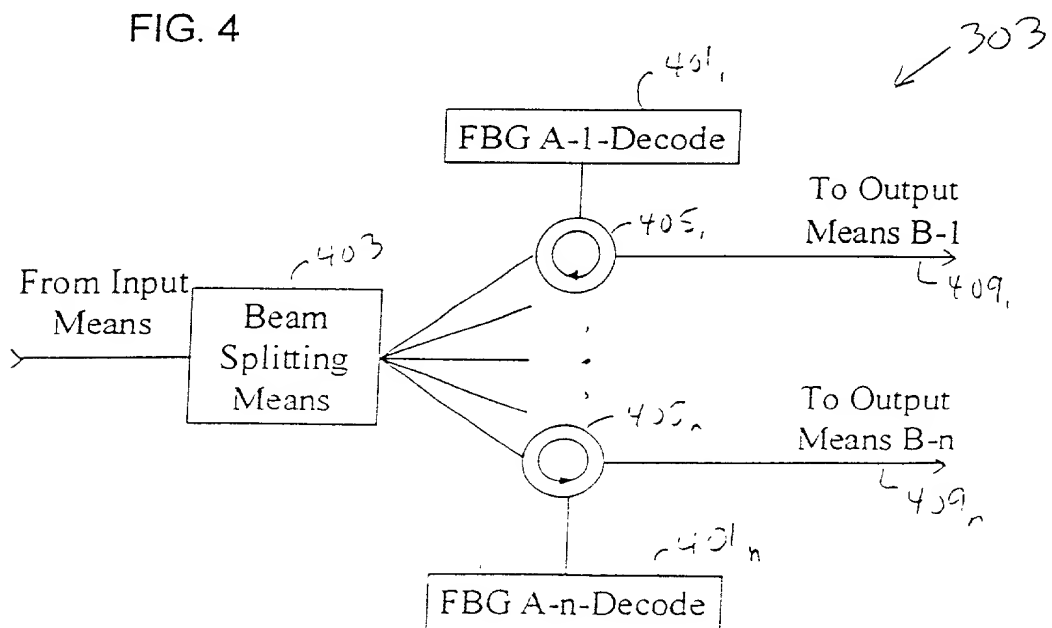
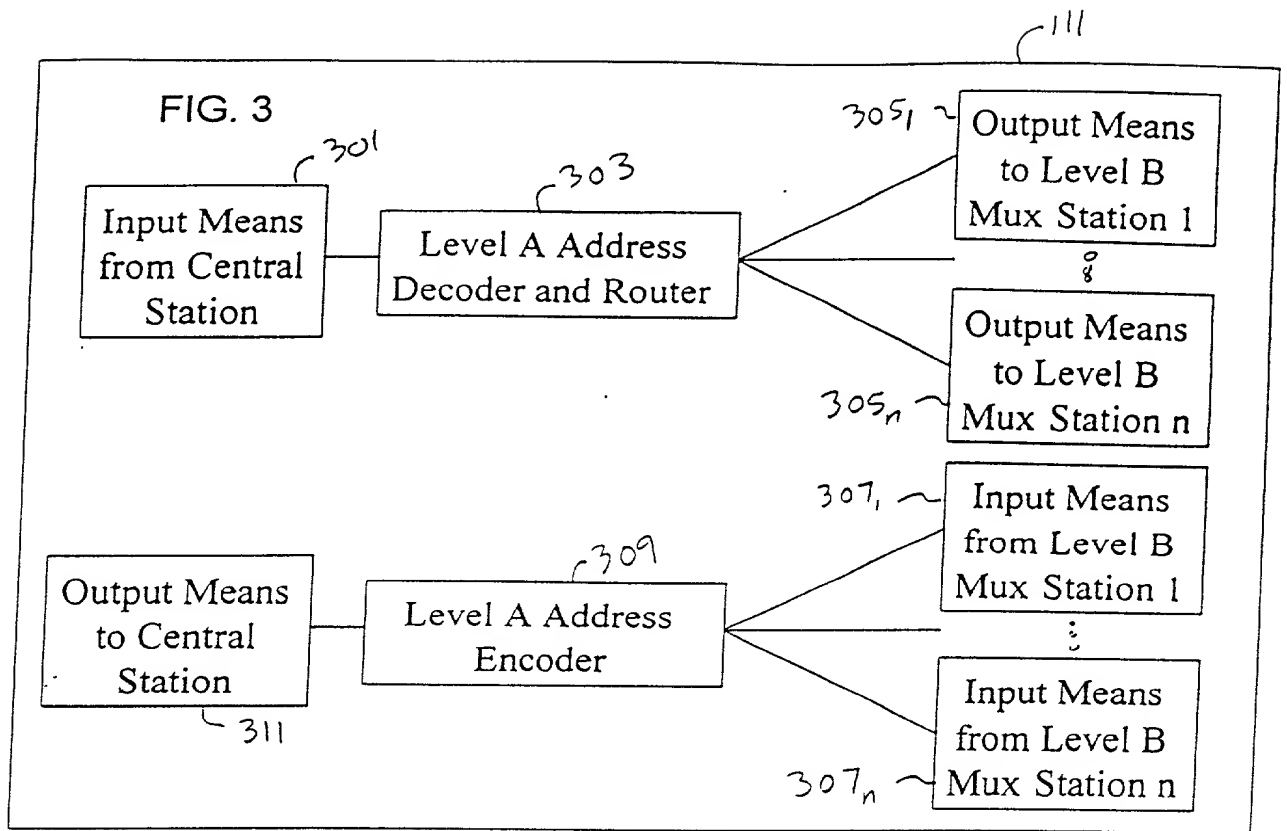


FIG. 5

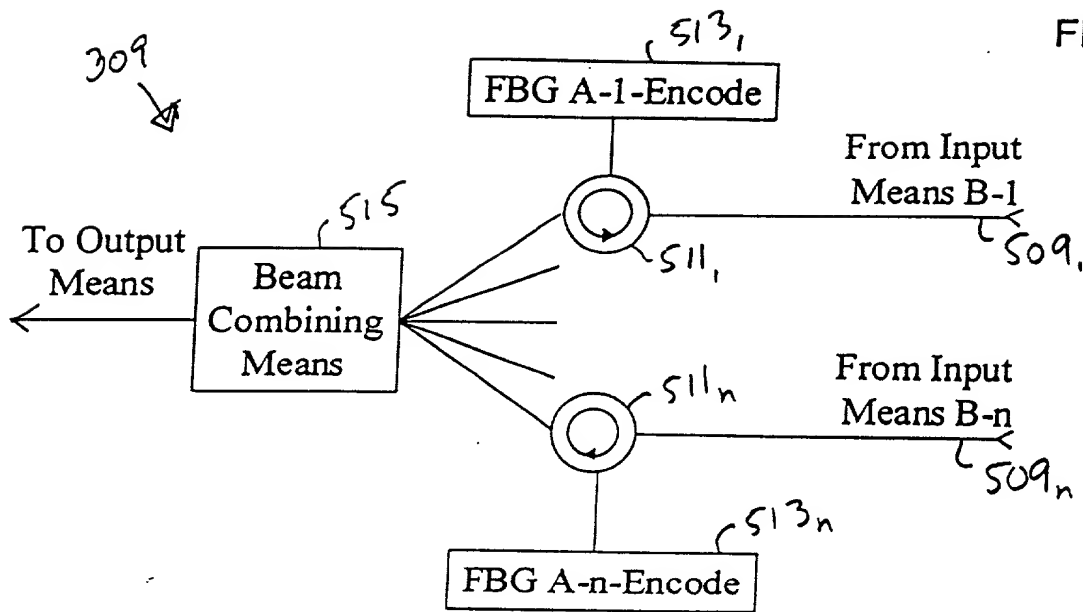


FIG. 6

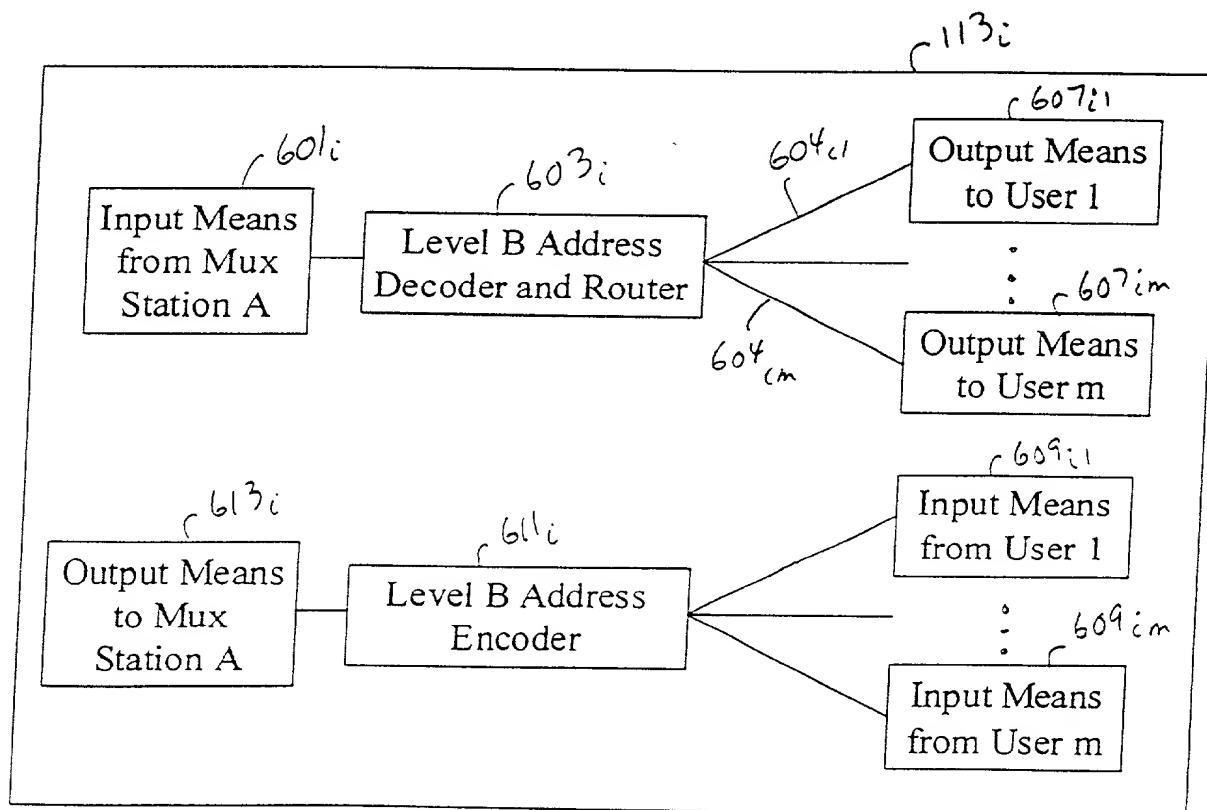


FIG. 7

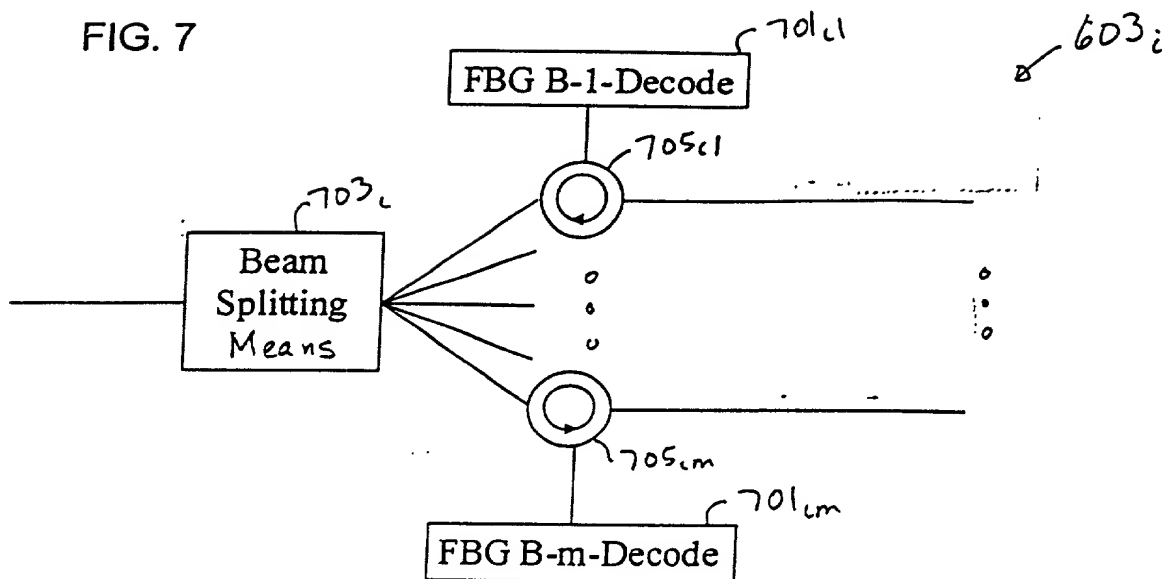


FIG. 8

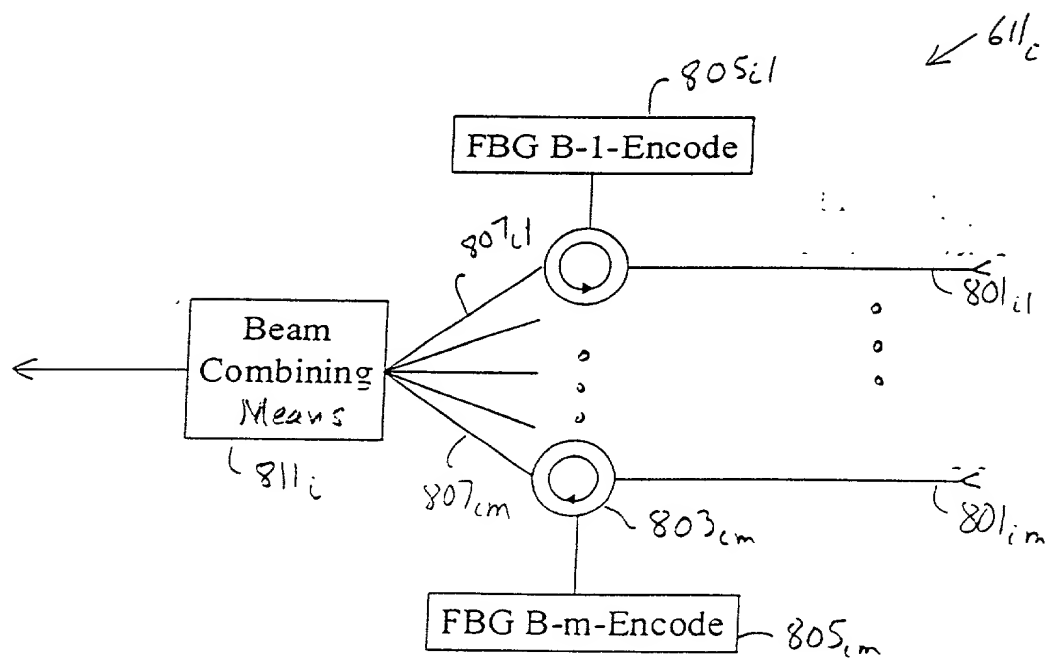


FIG. 9


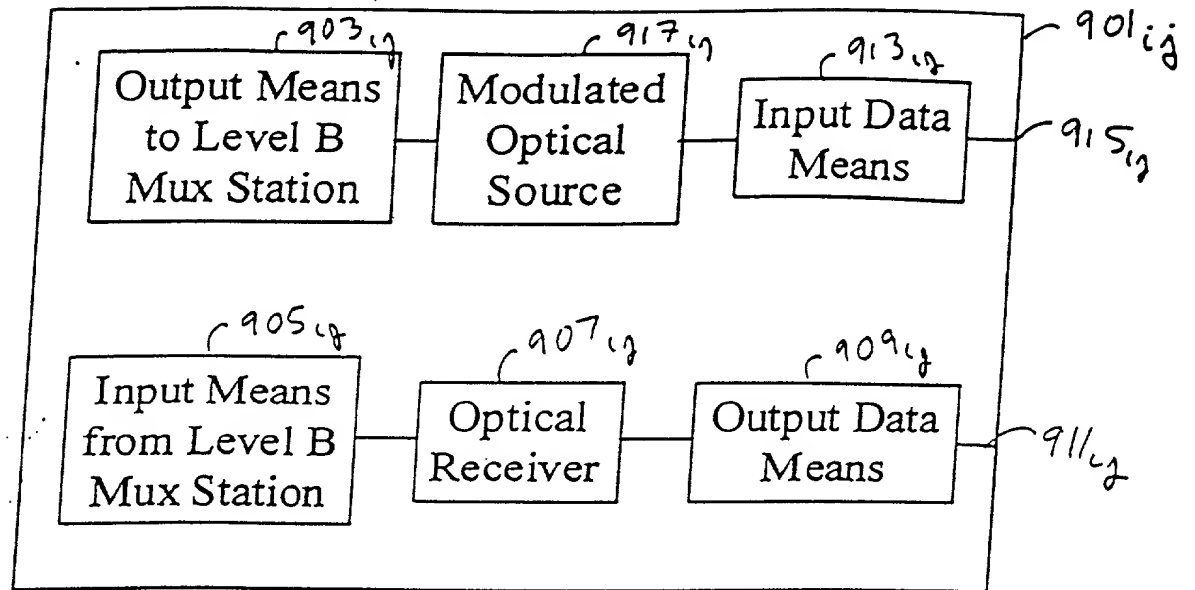


FIG. 10

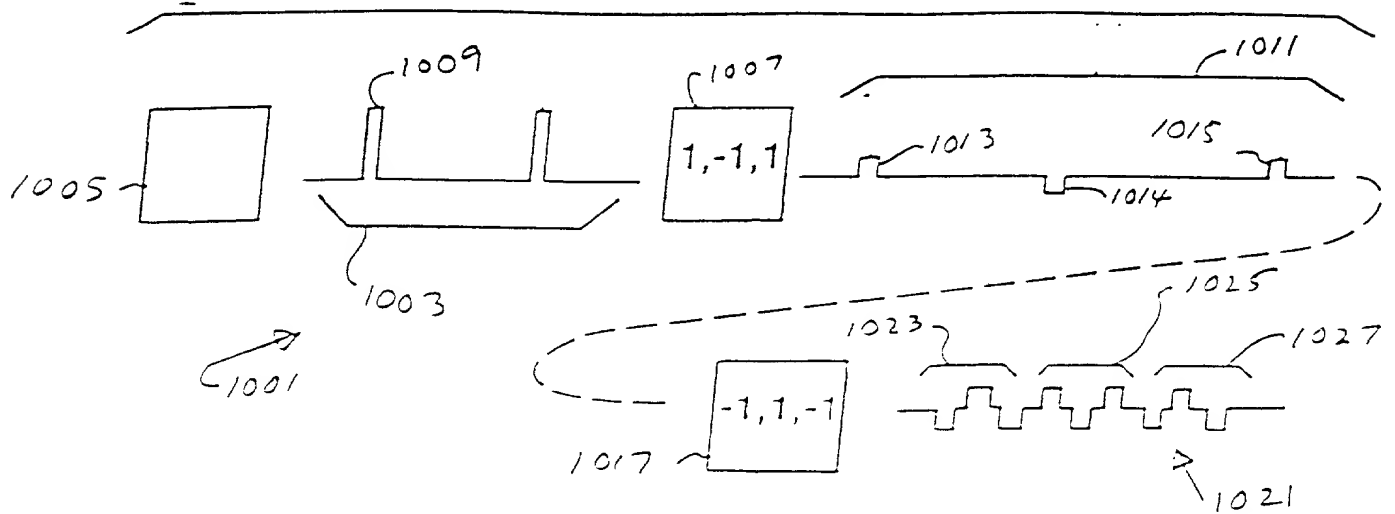

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **CODE-BASED OPTICAL NETWORKS, METHODS, AND APPARATUS**, the specification of which

☒ is attached hereto.

☐ was filed on _____ as Application No. _____.

☐ was described and claimed in PCT International Application No. _____, filed on _____, and as amended under PCT Article 19 on _____ (if applicable).

☐ and was amended on _____ (if applicable).

☐ with amendments through _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56. If this is a continuation-in-part application filed under the conditions specified in 35 U.S.C. § 120 which discloses and claims subject matter in addition to that disclosed in the prior copending application, I further acknowledge the duty to disclose material information as defined in 37 CFR § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

60/108,701 _____ Application Number	November 17, 1998 _____ Filing Date
---	---

I hereby claim the benefit under Title 35, United States Code, § 120 of any United

States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Application No.)_____
(Filing Date)_____
(Status: patented,
Pending, abandoned)

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from _____ as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application, to file a corresponding international application, and to transact all business in the Patent and Trademark Office connected therewith:

Name	Reg. No.	Name	Reg. No.
BEAN, Gregory V.	36,448	MAURER, Gregory L.	43,781
BECKER, Mark L.	31,325	NOONAN, William D.	30,878
CALDWELL, Lisa M.	41,653	PETERSEN, David P.	28,106
CAMPBELL, James	19,978	POLLEY, Richard J.	28,107
DeGRANDIS, Paula A.	43,581	SCOTTI, Robert F.	39,830
GEORGE, Samuel E.	44,119	SIEGEL, Susan Alpert	43,121
GIRARD, Michael P.	38,467	SLATER, Stacey C.	36,011
JAKUBEK, Joseph T.	34,190	STEPHENS JR., Donald L.	34,022
JOHNSON, Michelle L.	36,352	STUART, John W.	24,540
JONES, Michael D.	41,879	VANDENBERG, John D.	31,312
KLARQUIST, Kenneth S.	16,445	WHINSTON, Arthur L.	19,155
KLITZKE II, Ramon A.	30,188	WIGHT, Stephen A.	37,759
HARDING, Tanya M.	42,630	WINN, Garth A.	33,220
LEIGH, James S.	20,434		

Address all telephone calls to Michael D. Jones at telephone number (503) 226-7391.

Address all correspondence to:

KLARQUIST SPARKMAN CAMPBELL
LEIGH & WHINSTON, LLP
One World Trade Center, Suite 1600
121 S.W. Salmon Street
Portland, OR 97204-2988

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or first Inventor: Anders Grunnet-Jepsen

Inventor's Signature _____

Date

Residence: Eugene, Oregon

Citizenship: U.S.A.

Post Office Address: 3220 Twin Elms
Eugene, Oregon 97408

Full Name of Second Joint Inventor, if any: Alan E. Johnson

Inventor's Signature _____

Date

Residence: Eugene, Oregon

Citizenship: U.S.A.

Post Office Address: 2384 Sony Loop
Eugene, Oregon 97404

Full Name of Third Joint Inventor, if any: Eric S. Maniloff

Inventor's Signature _____

Date

Residence: Eugene, Oregon

Citizenship: U.S.A.

Post Office Address: 3160 Alyndale Drive
Eugene, Oregon 97404

Full Name of Fourth Joint Inventor, if any: Thomas W. Mossberg

Inventor's Signature _____

Date

Residence: Eugene, Oregon

Citizenship: U.S.A.

Post Office Address: 548 Lynnbrook Drive
Eugene, Oregon 97404

Inventor's Signature

Date _____

Citizenship: U.S.A.

Full Name of Sixth Joint Inventor, if any: John N. Sweetser

Inventor's Signature

Date _____

Citizenship: U.S.A.

Post Office Address: 3230 Onyx
Eugene, Oregon 97405